


Fios Extender

4x4 11ax Tri-band Wi-Fi extender

Model E3200

The Fios Extender is an 802.11ax Tri-band Wi-Fi extender that supports the latest Wi-Fi technology. It offers seamless roaming, band steering, AP steering, and Self-Organizing Networks (SON) technology. It's also equipped with a third radio to use for Wi-Fi backhaul to the Fios Router. 11ax Tri-band brings OFDMA and the highest throughput to users.

Industrial design

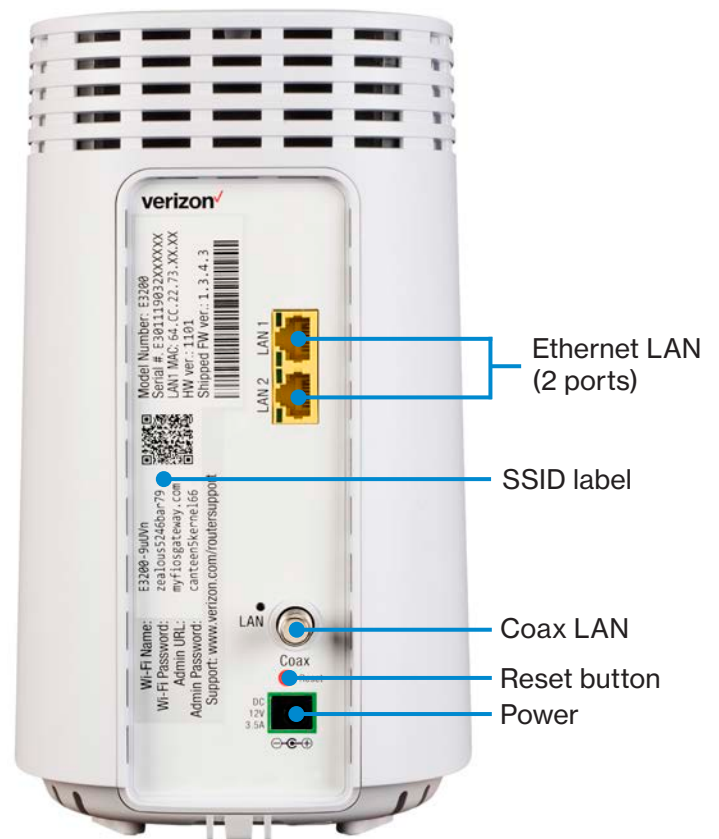

Technical specification

Hardware configuration

- Two Gigabit LAN ports
- Coax port supporting
 - MoCA 2.5 LAN
- Wi-Fi
 - 2.4 GHz 11ax 4x4
 - Two 5 GHz 11ax 4x4
 - Internal antenna
- Buttons
 - Reset (Back)
 - WPS (Front)
- LED indicators
 - One Status LED (Front)
 - One MoCA LAN LED (Back)
 - Ethernet LAN (Back)
- Memory
 - 1GB NAND
 - 512MB RAM
- PSU: 12V/3.5A (same as G3100)
- ID Dimension: 135*151*235.5mm (W*D*H)
- Environment
 - Ambient Temperature: 5°C ~ 40°C
 - Relative Humidity: 5% ~ 85% (non-condensed)

Wi-Fi features

- One 2.4 GHz 11ax with 4x4 spatial stream
- Two 5 GHz 11ax with 4x4 spatial stream
- Wi-Fi 6 Certified (802.11 ax)
- Backward compatible to 802.11a/b/g/n/ac
- Fully CPU off-load for 11ax chipset
- 20MHz, 40MHz, 80Mhz, and 160Mhz channel operation
- Dynamic Frequency Selection (DFS)
- Wi-Fi access control (MAC)
- Wi-Fi Protected Setup (WPS)
- WMM support
- Wi-Fi Security (WPA2/WPA3)
- Guest Wi-Fi (Wired backhaul only)

Management features

- Remote management via TR-069
- Data model support via TR-181
- HTTP embedded web server
- Web UI management via local or remote site
- Username/Password protection
- UPnP
- Diagnostics